CESAB CE200 - 300 2.0 – 3.0 tonne

Hand Pallet Trucks

CESAB H210 - H210E 1.0 tonne

Scissor Lifts







Truck Specifications

CESAB

CESAB CE230/O/Q/X/U Truck Specifications

				CESAB	CESAB
IDENTIFICATION					
1.1	Manufacturer			CESAB	CESAB
1.2	Model			CE230/O/Q/X	CE230U
1.4	Operator type			Hand	Hand
1.5	Load capacity/rated load	Q	[kg]	2300	2300
1.6	Load centre	c	[mm]	600	600
1.8	Load distance, centre of support arm wheel to face of forks	x	[mm]	945	945
1.9	Wheelbase	y	[mm]	1170	1170
WEIGHT					
2.1	Service weight		[kg]	63	63
2.2	Axle load, with load, steer/fork wheel		[kg]	375/805	375/805
2.3	Axle load, without load, steer/fork wheel		[kg]	20/10	20/10
WHEELS					
3.1	Steer/fork wheel			Nylon* (X: Powerthane*)/Nylon*	Nylon*/Nylon*
3.2	Wheel size, front		[mm]	Ø175x60	Ø175x60
3.3	Wheel size, rear		[mm]	Ø85x100 (Ø85x75[1)])	Ø75x100 (Ø75x75[1)])
3.5	Wheels, number front/rear			2/2*	2/2*
3.6	Track width, front	b_{10}	[mm]	132	132
3.7	Track width, rear	b_{11}	[mm]	364	364
DIMENSIONS					
4.4	Lift	h_3	[mm]	115	115
	Lift height	h_{23}	[mm]	200	190
4.9	Height of tiller in drive position, max.	h_{14}	[mm]	1220	1220
4.15	Height, fork lowered	h_{13}	[mm]	85	75
4.19	Overall length	l_1	[mm]	1500	1500
4.20	Length to face of forks	l_2	[mm]	365	365
4.21	Overall width	b_1	[mm]	520	520
4.22	Fork dimensions	s/e/l	[mm]	45/156/1150*	45/156/1150*
4.25	Width over forks	b_5	[mm]	520*	520*
4.32	Ground clearance, centre of wheelbase	m_2	[mm]	40	30
4.33	Aisle width for pallets 1000 x 1200 crossways	A_{st}	[mm]	1525	1525
4.34	Aisle width for pallets 800 x 1200 lengthways	A_{st}	[mm]	1725	1725
4.35	Turning radius	W_a	[mm]	1370	1370

Truck performance and dimensions are nominal and subject to tolerances.
Specifications are subject to change without notice

[1]) Bogie fork wheels
*) Further alternatives are available and will produce other values


CESAB CE200L – CE200ST – CE300 Truck Specifications


IDENTIFICATION						
1.1	Manufacturer			CESAB	CESAB	CESAB
1.2	Model			CE200L	CE200ST	CE300
1.4	Operator type			Hand	Hand	Hand
1.5	Load capacity/rated load	Q	[kg]	2000	2000	3000
1.6	Load centre	c	[mm]	600	600	600
1.8	Load distance, centre of support arm wheel to face of forks	x	[mm]	945	940	970
1.9	Wheelbase	y	[mm]	1170	1170	1185
WEIGHT						
2.1	Service weight		[kg]	63	70	105
2.2	Axle load, with load, steer/fork wheel		[kg]	375/805	375/805	489/1050
2.3	Axle load, without load, steer/fork wheel		[kg]	20/10	20/10	26/13
WHEELS						
3.1	Steer/fork wheel			Nylon*/Nylon*	Nylon/Nylon	Nylon*/Nylon*
3.2	Wheel size, front		[mm]	Ø140x60	Ø175x60	Ø175x60
3.3	Wheel size, rear		[mm]	Ø55x100 (Ø55x75[1)])	Ø85x100 (Ø85x75[1)])	Ø85x75
3.5	Wheels, number front/rear			2/2*	2/2*	2/4
3.6	Track width, front	b_{10}	[mm]	132	132	132
3.7	Track width, rear	b_{11}	[mm]	364	364	340
DIMENSIONS						
4.4	Lift	h_3	[mm]	70	115	115
	Lift height	h_{23}	[mm]	125	200	200
4.9	Height of tiller in drive position, max.	h_{14}	[mm]	1202	1220	1220
4.15	Height, fork lowered	h_{13}	[mm]	55	85	85
4.19	Overall length	l_1	[mm]	1500	1520	1510
4.20	Length to face of forks	l_2	[mm]	365	370	365
4.21	Overall width	b_1	[mm]	520	520	520
4.22	Fork dimensions	s/e/l	[mm]	45/156/1150*	45/156/1150	45/175/1150*
4.25	Width over forks	b_5	[mm]	520*	520*	520*
4.32	Ground clearance, centre of wheelbase	m_2	[mm]	10	40	40
4.33	Aisle width for pallets 1000 x 1200 crossways	A_{st}	[mm]	1525	1525	1540
4.34	Aisle width for pallets 800 x 1200 lengthways	A_{st}	[mm]	1725	1725	1740
4.35	Turning radius	W_a	[mm]	1370	1370	1385

Truck performance and dimensions are nominal and subject to tolerances.
Specifications are subject to change without notice

[1]) Bogie fork wheels
*) Further alternatives are available and will produce other values

CESAB Dimensional Drawings

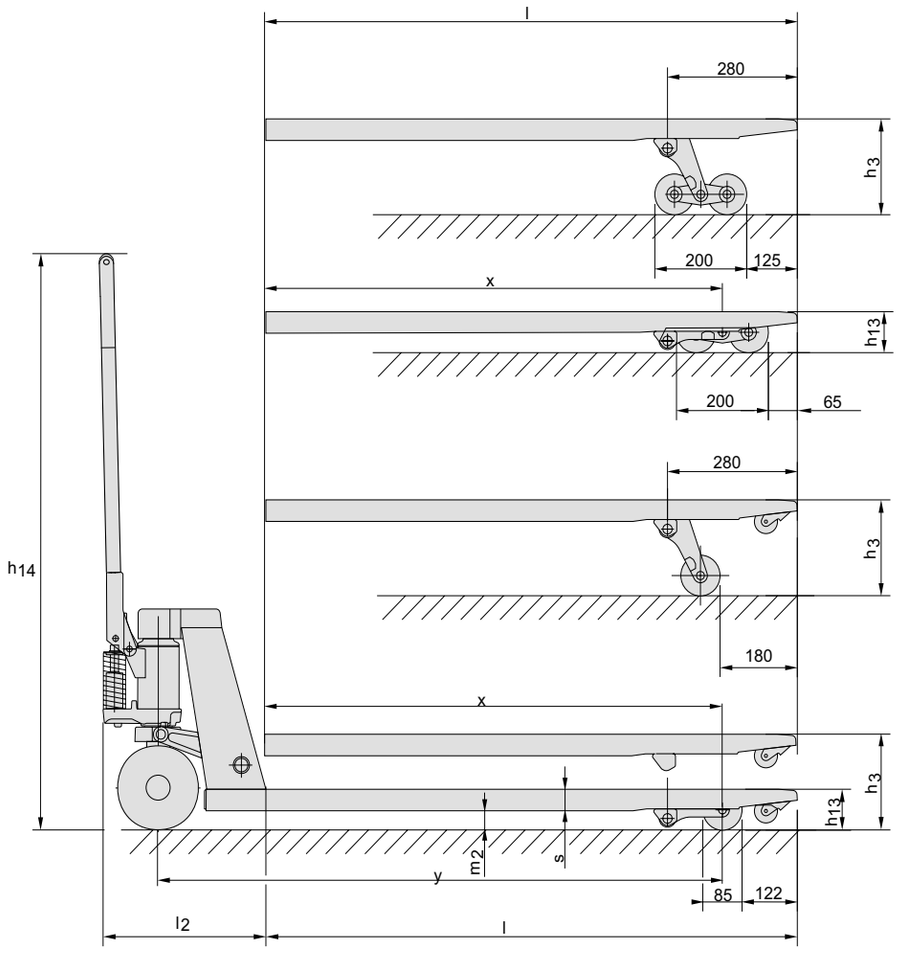

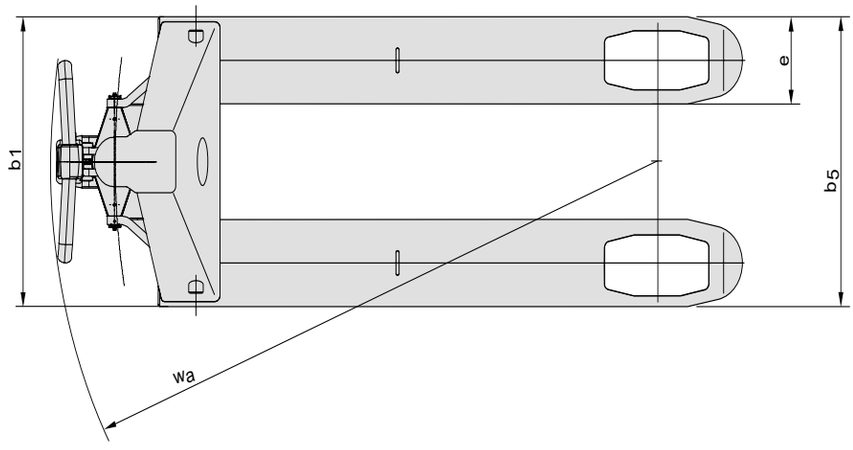

HPT_spec_sheet_06_EN.indd 4 21/08/2019 14:40


CESAB H210-H210E Truck Specifications


IDENTIFICATION					
1.1	Manufacturer			CESAB	CESAB
1.2	Model			H210	H210E
1.4	Operator type			Hand	Hand
1.5	Load capacity/rated load	Q	[kg]	1000	1000
1.6	Load centre	c	[mm]	600	600
1.8	Load distance, centre of support arm wheel to face of forks	x	[mm]	1013	1013
1.9	Wheelbase	y	[mm]	1343	1343
WEIGHT					
2.1	Service weight		[kg]	118	158
2.2	Axle load, with load, steer/support arm wheel		[kg]	195/366	212/369
2.3	Axle load, without load, steer/support arm wheel		[kg]	41/20	59/22
WHEELS					
3.1	Steer/fork wheel			Nylon	Nylon
3.2	Wheel size, front		[mm]	Ø175x58	Ø175x58
3.3	Wheel size, rear		[mm]	Ø75x77	Ø75x77
3.5	Wheels, number front/rear			2/2	2/2
3.6	Track width, front	b_{10}	[mm]	130	130
3.7	Track width, rear	b_{11}	[mm]	450	450
DIMENSIONS					
4.4	Lift	h_3	[mm]	713	713
	Lift height	h_{23}	[mm]	800	800
4.9	Height of tiller in drive position, max.	h_{14}	[mm]	1223	1223
4.15	Height, fork lowered	h_{13}	[mm]	87	87
4.19	Overall length	l_1	[mm]	1647	1647
4.20	Length to face of forks	l_2	[mm]	468	495
4.21	Overall width	b_1	[mm]	560	560
4.22	Fork dimensions	s/e/l	[mm]	50/156/1190	50/156/1190
4.25	Width over forks	b_5	[mm]	560	560
4.32	Ground clearance, centre of wheelbase	m_2	[mm]	19	19
4.34	Aisle width for pallets 800 x 1200 lengthways	A_{st}	[mm]	1909	1909
4.35	Turning radius	W_a	[mm]	1522	1522
ELECTRIC MOTOR					
6.2	Lift motor rating at S3 15%		[kW]	-	0.9
6.4	Battery voltage, nominal capacity K5		[V/Ah]	-	12/63
6.5	Battery weight		[kg]	-	23

Truck performance and dimensions are nominal and subject to tolerances.
Specifications are subject to change without notice

*) Further alternatives are available and will produce other values

CESAB Dimensional Drawings

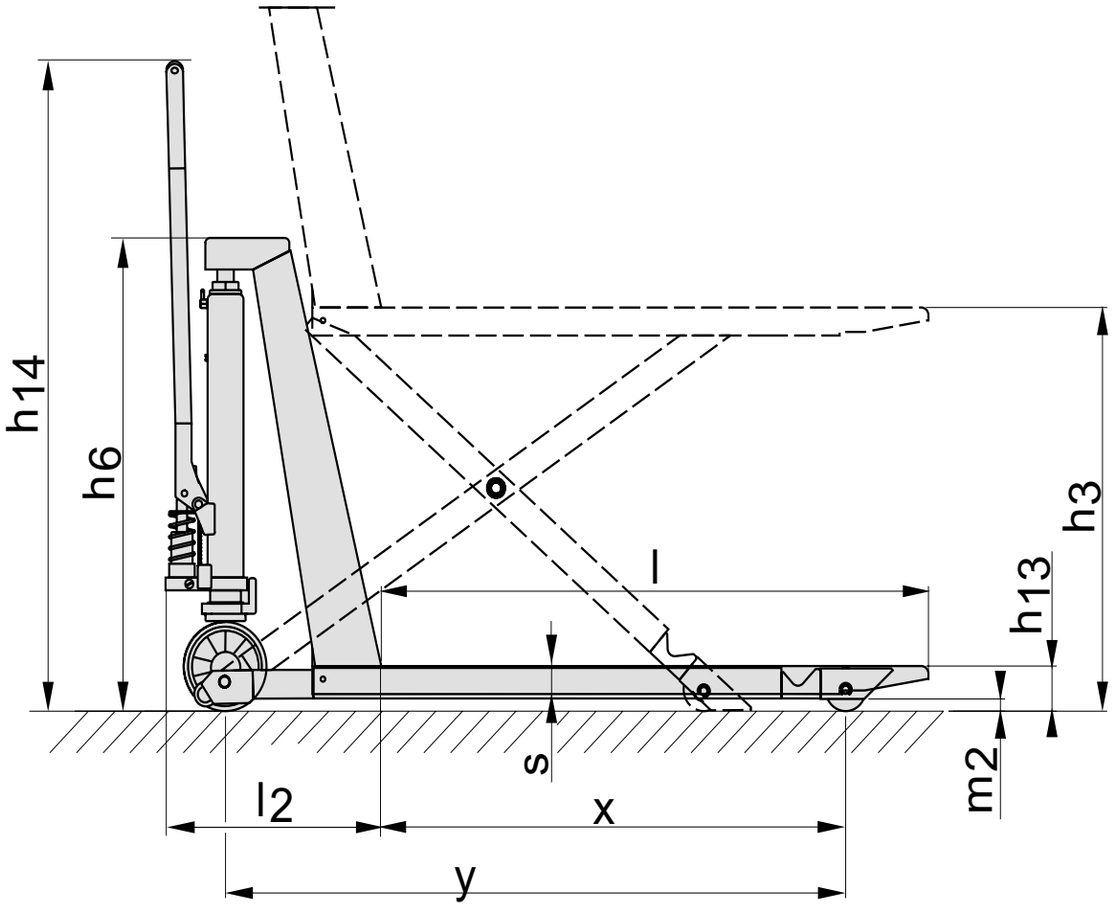

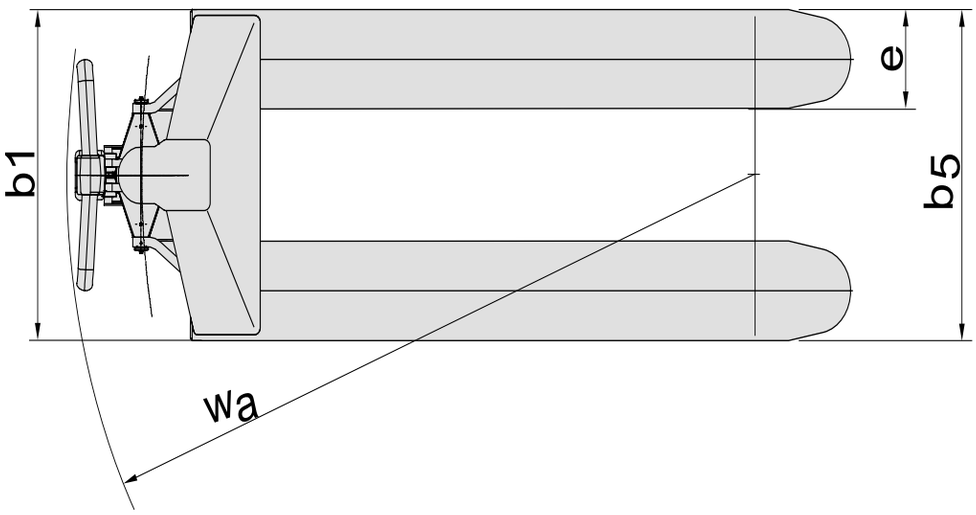

HPT_spec_sheet_06_EN.indd 6 21/08/2019 14:40

The data in this specification sheet was determined based on our standard testing conditions. Operating performance may vary depending on the actual specification and condition of the truck as well as the condition of the operating area. Availability and specifications are determined regionally and are subject to change without notice. Please consult your authorised CESAB dealership for further details. SPEC_ CE100-300_EN_2019_V6_EN – Copyright CESAB Material Handling Europe.

www.cesab-forklifts.eu