




货叉外侧间距200-755mm

型号/Model :
CQDM12/15-810
电动前移式叉车
Electric Reach Truck

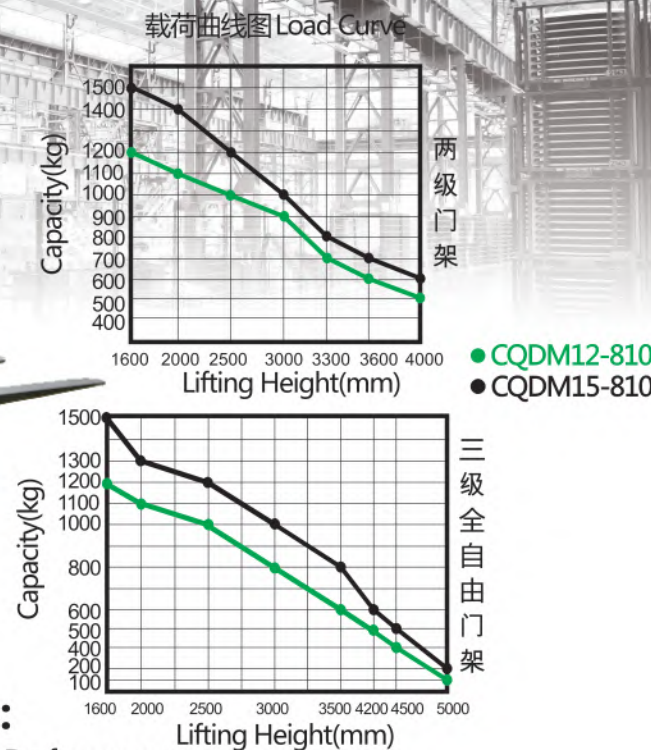

优点:

配置和性能

- 货叉倾斜,双油缸更平稳;
- 电液集成控制,多功能手柄;
- 电子助力转向,轻便、静音;
- 双路下降电磁阀,三种下降速度模式;
- 交流驱动电机,无碳刷,免维护;
- 起升自动限位,长寿命接近开关;

安全

- 转弯自动减速功能,更安全;
- 货叉高货位,车辆行驶自动降速;
- 驱动无级调速,安全,静音;
- 控制器多重自动保护系统;
- 紧急反向装置/紧急制动开关。

Advantages:

Configuration And Performance

- Fork tilt,double oil cylinder more smoothly.
- Electro-hydraulic integrated control , multi-function handle.
- Electronic power steering system , light and low noise.
- Two-way magnetic valve , three drop speed mode.
- AC driving motor , without carbon brush and free maintenance.
- Automatic lifting limit, proximity switch, long life.

Safety

- Curve automatic deceleration function,more safe.
- Goods high position,vehicle automatic reduction.
- Stepless speed control system , safe and quiet.
- Controller with Multipe automatic protection.
- Emergency reversing device/Emergency brake switch.

车型Type	起升高度mm Lift height	门架类型 Mast type	货叉外侧间距mm Outside width between forks	货叉内侧间距 mm Inside width between forks
CQDM12/15-810	1400/2000/2500/3000/3300/3600/4000	两级标准/2-STAGE STD	200-755	0-555
CQDM12/15-810	2500/3700/3900/4200/4500/5000	三级全自由/FULL FREE 3-STAGE		

特性 Feature			
型号 Model	—	CQDM12/15	CQDM12/15
配置号 Configuration No.	—	810	
门架类型 Mast type	—	两级2-Stage STD	三级全自由 Full free 3-stage
操作类型 Operating type	—	乘驾式 Stand on	
额定载重 Load capacity	kg	1200/1500	
载荷中心距 Load center	mm	500	
轴距 Wheel base	mm	1332	
车轮 Wheels			
轮子类型(前/后) Wheels type	—	PU	
驱动轮/平衡轮/承重轮 数量 Wheel quantity Driving wheel/Balance wheel/Bearing wheel	—	1/0/2	
驱动轮尺寸 Driving wheel size	—	φ248×75	
承重轮尺寸 Bearing wheel size	—	φ235×85	
尺寸 Dimension			
门架前移距离 Reach distance	mm	0-425	
标准门架起升高度 Standard lift height	mm	1400/2000/2500/3000/ 3300/3600/4000	2500/3700/3900/4200/ 4500/5000
门架作业时整车最大高度 Max extend height	mm	2280/2880/3380/3880/ 4180/4480/4880	3405/4605/4805/5105/ 5405/5905
门架缩回时整车静态高度 Mast lowered height	mm	1490/1790/2040/2290/ 2440/2590/2790	1432/1870/1940/2040/ 2140/2357
自由提升高度 Free lifting height	mm	—	714/1114/1180/1280/ 1380/1547
货叉最低高度 Lowered fork height	mm	55	
标准货叉规格(长/宽/厚) Fork size(length/width/thickness)	mm	1070/100/40	
整车全长,踏板收起/放下 Overall length	mm	2440/2896	
车体宽度 Overall width	mm	1083	
货叉外侧间距 Outside width between forks	mm	200-755	
货叉倾斜角度(前/后) Tilt of fork (F/B)	Grad	3/5	
最小转弯半径,踏板收起/放下 Min.Turning radius	mm	1596/2040	
最小直角堆垛通道宽度,踏板收起/放下(托盘800×1200,1200跨货叉放置) Min.Aisle width for pallets 800×1200	mm	2620/3050	
最小直角堆垛通道宽度,踏板收起/放下(托盘1000×1200,1200沿货叉放置) Min.Aisle width for pallets 1000×1200	mm	2645/3075	
最小离地间隙 Min.ground clearance	mm	60	
性能 Performance			
最大行驶速度,满载/空载 Travel speed, laden/unladen	km/h	5/5.5	
最大起升速度,满载/空载 Lift speed, laden/unladen	mm/s	130/180	
最大下降速度,满载/空载 Lowering speed, laden/unladen	mm/s	100/180	
爬坡度,满载/空载 Gradeability, laden/unladen	%	3/5	
电气配置 Electrical configuration			
驱动电机/起升电机/转向电机 Drive motor/Lift motor/Steering motor	kW	AC1.5/DC3.0/DC0.15	
蓄电池电压 Battery voltage	V	24	
蓄电池容量 Battery capacity	Ah	280	
制动 Brake	—	电磁/再生 Electromagnetic/Regenerative	
控制器型号 Controller	—	ZAPI	
重量 Weight			
蓄电池重量 Battery weight	kg	235	
自重(包含蓄电池) Service weight with battery	kg	2185	2205

*本公司保留更改产品设计和规格的权利,恕不另行通知。



HELI 安徽合力股份有限公司
ANHUI HELI CO., LTD.
地址:中国合肥经开区方兴大道668号
电话:(86 551)63632133,63648005,63689000
传真:(86 551)63633431
服务:4001-600761
网址: http://www.helichina.com

授权经销商

ADD:NO. 668 Fangxing Street, Economical & Development Zone, Hefei, P.R. China
TEL:(86 551)63632133,63648005,63689000
FAX:(86 551)63633431
400 SERVICE: 4001-600761
WEBSITE: http://www.helichina.com